


## Avalanche Energy Rated N-Channel Power MOSFETs

12A and 14A, 60V-100V  
 $r_{\text{DS(on)}} = 0.18\Omega$  and  $0.25\Omega$

### Features:


- Single pulse avalanche energy rated
- SOA is power-dissipation limited
- Nanosecond switching speeds
- Linear transfer characteristics
- High input impedance

### N-CHANNEL ENHANCEMENT MODE



### TERMINAL DIAGRAM

### TERMINAL DESIGNATION

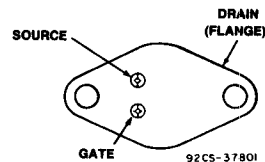

### JEDEC TO - 204AA

The IRF130R, IRF131R, IRF132R and IRF133R are advanced power MOSFETs designed, tested, and guaranteed to withstand a specified level of energy in the breakdown avalanche mode of operation. These are n-channel enhancement-mode silicon-gate power field-effect transistors designed for applications such as switching regulators, switching converters, motor drivers, relay drivers, and drivers for high-power bipolar switching transistors requiring high speed and low gate-drive power. These types can be operated directly from integrated circuits.

The IRF-types are supplied in the JEDEC TO-204AA steel package.


### Absolute Maximum Ratings

Parameter	IRF130R	IRF131R	IRF132R	IRF133R	Units
$V_{\text{DS}}$ Drain - Source Voltage ①	100	60	100	60	V
$V_{\text{DGR}}$ Drain - Gate Voltage ( $R_{\text{GS}} = 20 \text{ K}\Omega$ ) ①	100	60	100	60	V
$I_{\text{D}} @ T_{\text{C}} = 25^{\circ}\text{C}$ Continuous Drain Current	14	14	12	12	A
$I_{\text{D}} @ T_{\text{C}} = 100^{\circ}\text{C}$ Continuous Drain Current	9.0	9.0	8.0	8.0	A
$I_{\text{DM}}$ Pulsed Drain Current ③	56	56	48	48	A
$V_{\text{GS}}$ Gate - Source Voltage	$\pm 20$				V
$P_{\text{D}} @ T_{\text{C}} = 25^{\circ}\text{C}$ Max. Power Dissipation	75 (See Fig. 14)				W
Linear Derating Factor	0.6 (See Fig. 14)				W/ $^{\circ}\text{C}$
$E_{\text{AS}}$ Single Pulse Avalanche Energy Rating ④	69				mj
$T_{\text{J}}$ $T_{\text{stg}}$ Operating Junction and Storage Temperature Range	-55 to 150				$^{\circ}\text{C}$
Lead Temperature	300 (0.063 in. (1.6mm) from case for 10s)				$^{\circ}\text{C}$

IRF130R, IRF131R, IRF132R, IRF133R

Electrical Characteristics @ T<sub>C</sub> = 25°C (Unless Otherwise Specified)

Parameter	Type	Min.	Typ.	Max.	Units	Test Conditions
BV <sub>DSS</sub> Drain - Source Breakdown Voltage	IRF130R IRF132R	100	—	—	V	V <sub>GS</sub> = 0V
	IRF131R IRF133R	60	—	—	V	I <sub>D</sub> = 250μA
V <sub>GS(th)</sub> Gate Threshold Voltage	ALL	2.0	—	4.0	V	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250μA
I <sub>GSS</sub> Gate-Source Leakage Forward	ALL	—	—	100	nA	V <sub>GS</sub> = 20V
I <sub>GSS</sub> Gate-Source Leakage Reverse	ALL	—	—	-100	nA	V <sub>GS</sub> = -20V
I <sub>DSS</sub> Zero Gate Voltage Drain Current	ALL	—	—	250	μA	V <sub>DS</sub> = Max. Rating, V <sub>GS</sub> = 0V
		—	—	1000	μA	V <sub>DS</sub> = Max. Rating x 0.8, V <sub>GS</sub> = 0V, T <sub>C</sub> = 125°C
I <sub>D(on)</sub> On-State Drain Current ②	IRF130R IRF131R	14	—	—	A	V <sub>DS</sub> > I <sub>D(on)</sub> x R <sub>DS(on)max.</sub> , V <sub>GS</sub> = 10V
	IRF132R IRF133R	12	—	—	A	
	IRF130R IRF131R	—	0.14	0.18	Ω	
R <sub>DS(on)</sub> Static Drain-Source On-State Resistance ②	IRF132R IRF133R	—	0.20	0.25	Ω	V <sub>GS</sub> = 10V, I <sub>D</sub> = 8.0A
	IRF130R IRF131R	—	0.14	0.18	Ω	
g <sub>fs</sub> Forward Transconductance ②	ALL	4.0	5.5	—	S(Ω)	V <sub>DS</sub> > I <sub>D(on)</sub> x R <sub>DS(on)max.</sub> , I <sub>D</sub> = 8.0A
C <sub>iss</sub> Input Capacitance	ALL	—	600	—	pF	V <sub>GS</sub> = 0V, V <sub>DS</sub> = 25V, f = 1.0 MHz
C <sub>oss</sub> Output Capacitance	ALL	—	300	—	pF	See Fig. 10
C <sub>rrs</sub> Reverse Transfer Capacitance	ALL	—	100	—	pF	
t <sub>d(on)</sub> Turn-On Delay Time	ALL	—	—	30	ns	V <sub>DD</sub> = 36V, I <sub>D</sub> = 8.0A, Z <sub>0</sub> = 15Ω See Fig. 17 (MOSFET switching times are essentially independent of operating temperature.)
t <sub>r</sub> Rise Time	ALL	—	—	75	ns	
t <sub>d(off)</sub> Turn-Off Delay Time	ALL	—	—	40	ns	
t <sub>f</sub> Fall Time	ALL	—	—	45	ns	
Q <sub>g</sub> Total Gate Charge (Gate-Source Plus Gate-Drain)	ALL	—	18	30	nC	V <sub>GS</sub> = 10V, I <sub>D</sub> = 18A, V <sub>DS</sub> = 0.8 Max. Rating. See Fig. 18 for test circuit. (Gate charge is essentially independent of operating temperature.)
Q <sub>gs</sub> Gate-Source Charge	ALL	—	9.0	—	nC	
Q <sub>gd</sub> Gate-Drain ("Miller") Charge	ALL	—	9.0	—	nC	
L <sub>D</sub> Internal Drain Inductance	ALL	—	5.0	—	nH	Measured between the contact screw on header that is closer to source and gate pins and center of die.
L <sub>S</sub> Internal Source Inductance	ALL	—	12.5	—	nH	Measured from the source pin, 6 mm (0.25 in.) from header and source bonding pad.




6

Thermal Resistance

R <sub>thJC</sub> Junction-to-Case	ALL	—	—	1.67	°C/W	
R <sub>thCS</sub> Case-to-Sink	ALL	—	0.1	—	°C/W	Mounting surface flat, smooth, and greased.
R <sub>thJA</sub> Junction-to-Ambient	ALL	—	—	30	°C/W	Free Air Operation

Source-Drain Diode Ratings and Characteristics

I <sub>S</sub> Continuous Source Current (Body Diode)	IRF130R IRF131R	—	—	14	A	Modified MOSFET symbol showing the integral reverse P-N junction rectifier.
	IRF132R IRF133R	—	—	12	A	
I <sub>SM</sub> Pulse Source Current (Body Diode) ③	IRF130R IRF131R	—	—	56	A	
	IRF132R IRF133R	—	—	48	A	
V <sub>SD</sub> Diode Forward Voltage ②	IRF130R IRF131R	—	—	2.5	V	T <sub>C</sub> = 25°C, I <sub>S</sub> = 14A, V <sub>GS</sub> = 0V
	IRF132R IRF133R	—	—	2.3	V	T <sub>C</sub> = 25°C, I <sub>S</sub> = 12A, V <sub>GS</sub> = 0V
t <sub>rr</sub> Reverse Recovery Time	ALL	—	360	—	ns	T <sub>J</sub> = 150°C, I <sub>F</sub> = 14A, dI <sub>F</sub> /dt = 100A/μs
Q <sub>RR</sub> Reverse Recovered Charge	ALL	—	2.1	—	μC	T <sub>J</sub> = 150°C, I <sub>F</sub> = 14A, dI <sub>F</sub> /dt = 100A/μs
t <sub>on</sub> Forward Turn-on Time	ALL	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by L <sub>S</sub> + L <sub>D</sub> .				



- ① T<sub>J</sub> = 25°C to 150°C. ② Pulse Test: Pulse width ≤ 300μs, Duty Cycle ≤ 2%.
- ③ Repetitive Rating: Pulse width limited by max. junction temperature. See Transient Thermal Impedance Curve (Fig. 5).
- ④ V<sub>DD</sub> = 25V, starting T<sub>J</sub> = 25°C, L = 530μH, R<sub>gs</sub> = 25Ω, I<sub>peak</sub> = 14A. See figures 15, 16.

IRF130R, IRF131R, IRF132R, IRF133R

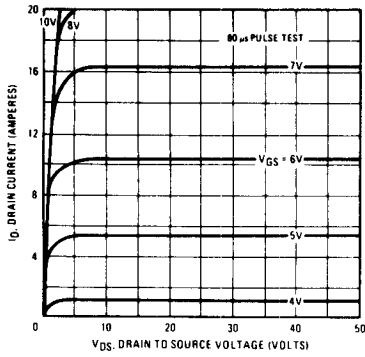


Fig. 1 - Typical Output Characteristics

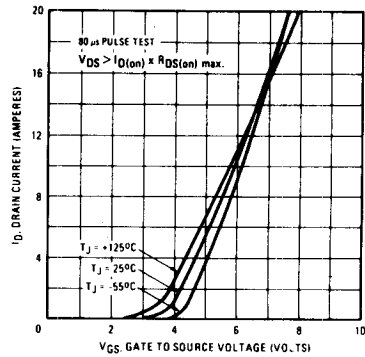


Fig. 2 - Typical Transfer Characteristics

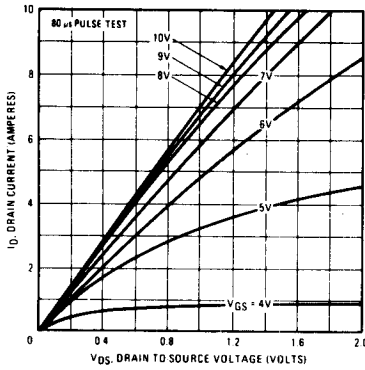


Fig. 3 - Typical Saturation Characteristics

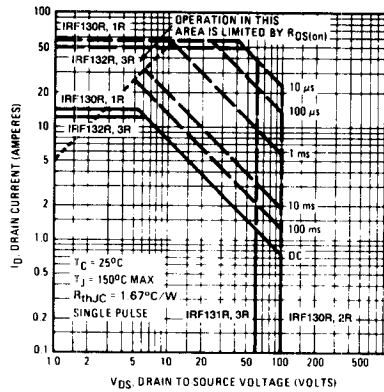


Fig. 4 - Maximum Safe Operating Area

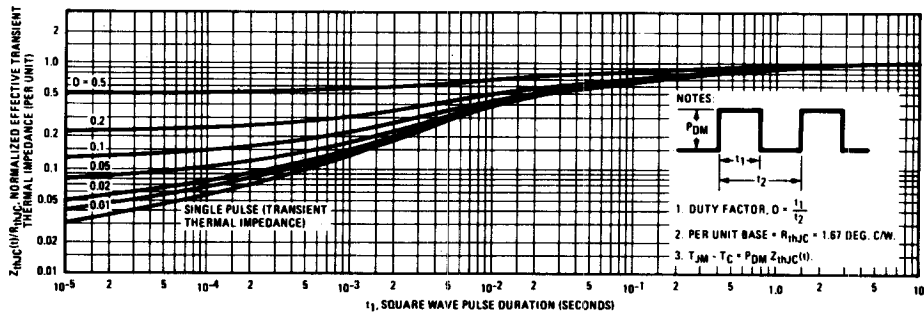


Fig. 5 - Maximum Effective Transient Thermal Impedance, Junction-to-Case Vs. Pulse Duration

IRF130R, IRF131R, IRF132R, IRF133R

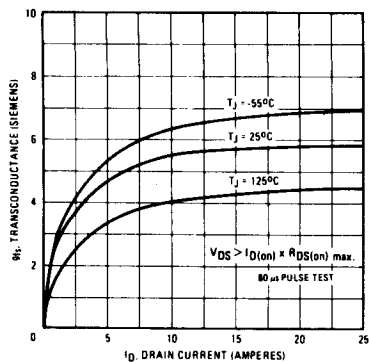


Fig. 6 - Typical Transconductance Vs. Drain Current

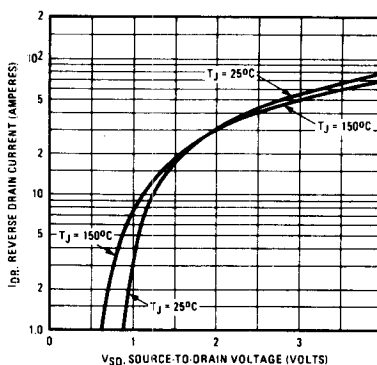


Fig. 7 - Typical Source-Drain Diode Forward Voltage

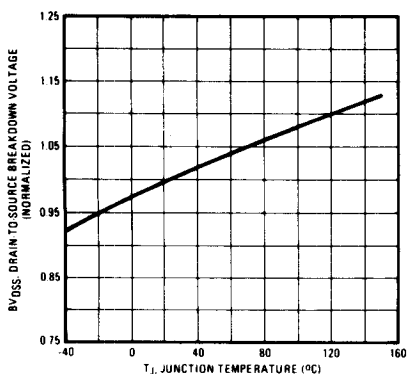


Fig. 8 - Breakdown Voltage Vs. Temperature

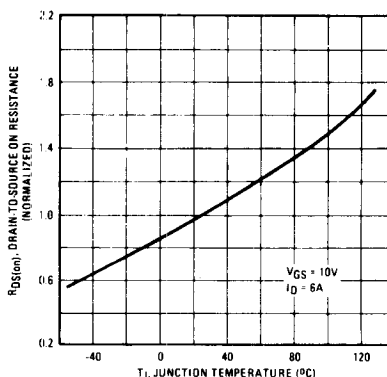


Fig. 9 - Normalized On-Resistance Vs. Temperature

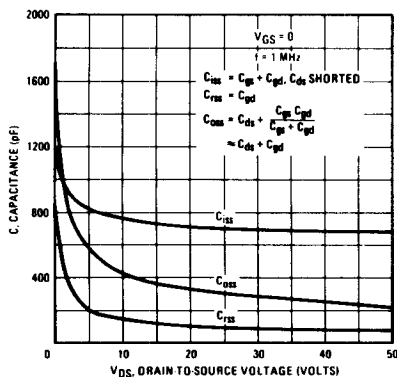


Fig. 10 - Typical Capacitance Vs. Drain-to-Source Voltage

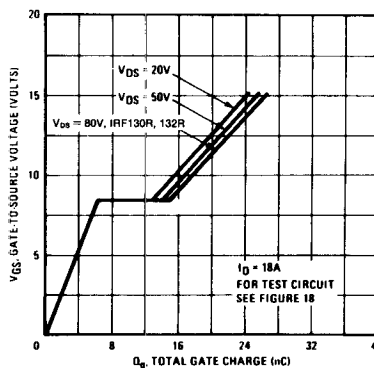


Fig. 11 - Typical Gate Charge Vs. Gate-to-Source Voltage

IRF130R, IRF131R, IRF132R, IRF133R

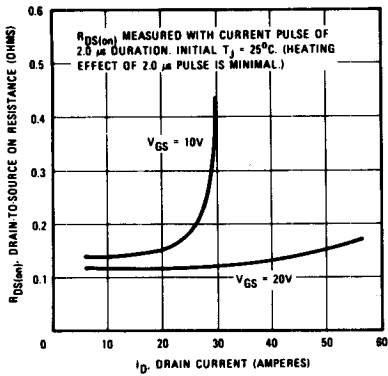


Fig. 12 - Typical On-Resistance Vs. Drain Current

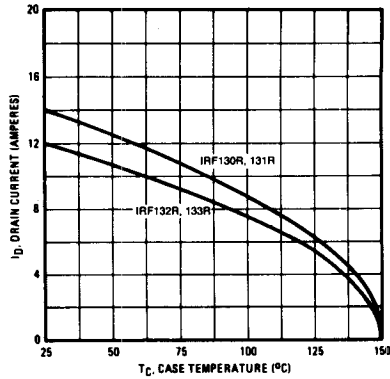


Fig. 13 - Maximum Drain Current Vs. Case Temperature

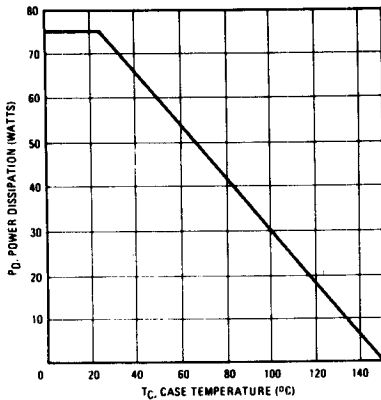


Fig. 14 - Power Vs. Temperature Derating Curve

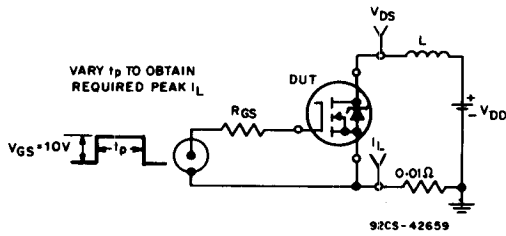


Fig. 15 - Unclamped Energy Test Circuit




Fig. 16 - Unclamped Energy Waveforms

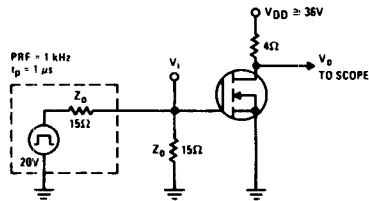


Fig. 17 - Switching Time Test Circuit

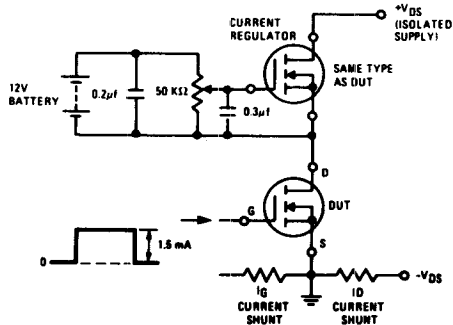


Fig. 18 - Gate Charge Test Circuit